

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 January 2005 (06.01.2005)

PCT

(10) International Publication Number
WO 2005/001318 A1

(51) International Patent Classification⁷: **F16K 5/06**

(21) International Application Number:
PCT/KR2004/001053

(22) International Filing Date: 6 May 2004 (06.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2003-0042340 27 June 2003 (27.06.2003) KR

(71) Applicant (for all designated States except US): ANKUK
VALVE CO., LTD. [KR/KR]; 672-25, Seonggok-dong,
Danwon-gu, Ansan-si, Gyeonggi-do 425-836 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): AN, Byung-Moo
[KR/KR]; #60, Eumnae 1-ri, Uljin-eup, Uljin-gun,
Gyeongsangbuk-do 767-801 (KR).

(74) Agent: CHOI, Seog-Won; C & L Patent Law Office, 2nd
Fl., Gangrim Bldg., 734-5 Yeoksam-dong, Gangnam-gu,
Seoul 135-080 (KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

[Continued on next page]

(54) Title: BALL VALVE

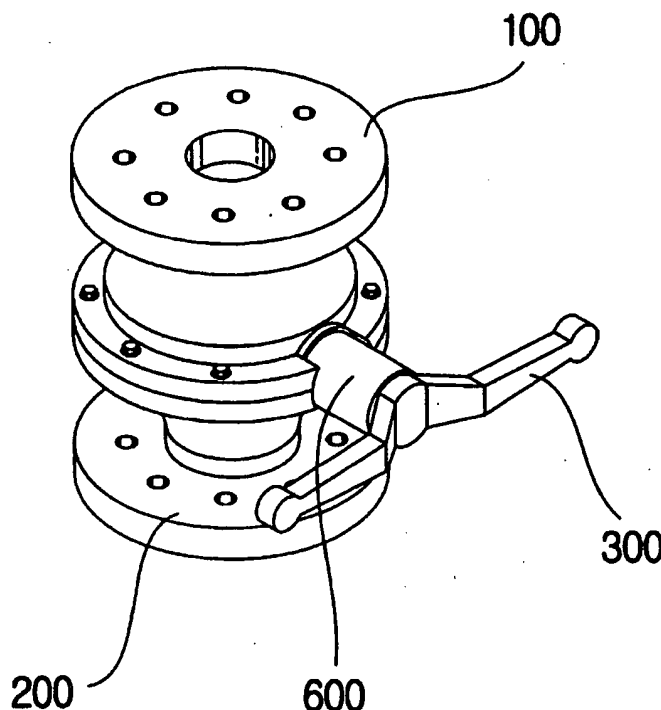

(57) Abstract: The present invention provides a ball valve to control a flow of a fluid. The ball valve includes symmetric first and second valve casings (100) and (200) which respectively have first and second ball seats (120) and (220), first and second coupling flanges (130) and (230), first and second lever receiving parts (110) and (210), first and second ring-shaped grooves (132) and (232), a plurality of first and second coupling holes (131) and (231), and first and second stoppers (111) and (211). The ball valve further includes a ball (400) which is seated in both the first and second ball seats (120) and (220), a control lever (300) which is coupled to the ball (400) to control the ball, and a ring unit (500) which is seated in both the first and second ring-shaped grooves (132) and (232). The ball valve further includes a cap (600) which is fastened to both the first and second lever receiving parts (110) and (210).



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.